



# NOW OFFERING CUSTOM LENGTH HVAC HOSE

In Addition To Our Standard Stainless Steel Braided Hose Lengths We Now Offer Hose in "Custom" Lengths to "Best Fit" the Need Of Your Installation.

Standard Lengths Include 12", 18", 24", 36" & 48"

Standard Swivel Adapter Connections: MNPT, FNPT & FSWT

## Advantages for YOU:

- ⇒ Connection Sizes of 1/2", 3/4", 1", & 1-1/4"
- ⇒ Hose Lengths Ranging From 6" to 10'
- ⇒ Hose Lengths Available in 1" Increments
- ⇒ Length Tolerance is -0/ + 3/8"
- ⇒ Lengths up to 36" / 5 day lead time\*
- ⇒ Swivel Adapters Available With & Without Ports

## Operating Specifications:



- ⇒ **Maximum Working Pressure:** 400 psi
- ⇒ **Bend Radius:** 1/2" (2"), 3/4" (3.5"), 1" (4.5"), 1-1/4" (6")
- ⇒ **Burst Pressure Exceeds:** (1600) PSI
- ⇒ **Temperature Rating:** (32°F to 225°F)
- ⇒ **Hose Connectors:** Permanently Crimped
- ⇒ **Swivels:** Use Self Actuating Fiber Gasket
- ⇒ **Threads:** National Pipe Threads per ANSI B1.20.3-Type 1- Class 1
- ⇒ **Connectors:** Brass UNSC36000

## Material Specifications:

- ⇒ Liner – Reinforced EPDM
- ⇒ Cover – Stainless Steel Braid
- ⇒ Ferrules – 300 Stainless Steel
- ⇒ Connections – Brass

## Other Available Options:

- ⇒ Hose w/Mesurflo® Automatic Balancing Valve (Pictured)
- ⇒ Hose w/Automatic Balancing Valve & Ball Valve
- ⇒ Hose w/Ball Valve

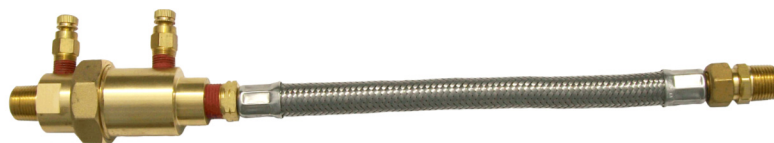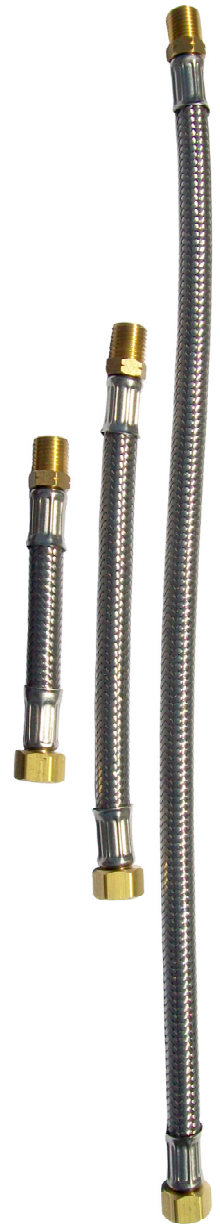

\* Consult Factory for Lead Times for Hose Lengths Greater Than 36".