




Sizes: 1/2", 3/4", 1", 1-1/4", 1-1/2" & 2"

Type: Ball Valve

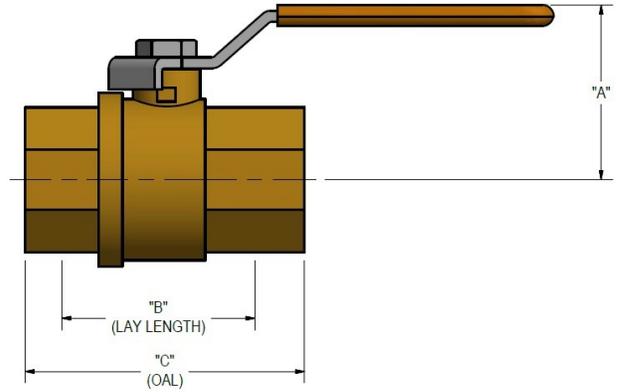

Specifications:

- Inlet Connection: FNPT
- Outlet Connection: FNPT
- Maximum Working Pressure: 600 PSI
- Working Temperature Range: -4°F – 230°F
- Handle: Lever
- Blow Out Proof Stem
- Double O-Ring Seal
- Thread Fittings NPT per ASME/ANSI B1.20. and B31.9

Material Specifications	
Valve Body	Brass
Seats	PTFE
Ball	Chrome Plated Brass
Stem	Nickel Plated Brass
Handle	Carbon Steel with PVC Dip Coating
O-Rings	EPDM
Pressure/Temperature Port (Optional)	Brass

Options:

- Handle: Short, Extended
- Pressure Temperature Port¹: None, Regular, Extended
- Memory Stop
- Stainless Steel Ball and Stem

Non Ported Valve Dimensions*			
SIZE (in)	A	B	C
1/2	1.7	1.3	2.2
3/4	2.0	1.4	2.5
1	2.2	1.8	2.8
1-1/4	3.0	2.2	3.4
1-1/2	3.2	2.6	3.6
2	3.5	3.3	4.3

¹ Extended Handles cannot be ordered without extended Pressure/Temperature Ports

* Dimensions listed are approximate. Various connections types can change the lay lengths. Consult factory for more detail. Consult factory for side ported ball valve dimensions