



Name: Mesurflo® Bronze Automatic Balancing Valves

Sizes: 1-1/2"

GPM: 26.0 - 50.0

Type: Automatic Balancing Valve


Model: 2333

Standard Features Include:

- ⇒ FNPT Inlet & Outlet Connections
- ⇒ Differential Operating Pressure: 5-80 PSID
- ⇒ ± 10% Accuracy
- ⇒ Changeable GPM Cartridges
- ⇒ Operating Temperature Range 32° to 225°F
- ⇒ Valves Labeled with Model No., Size & Flow Rate
- ⇒ Valve Body Rated for 400 PSIG
- ⇒ Limited Lifetime Warranty

Options:

- ⇒ Stainless Steel Tag-Chain

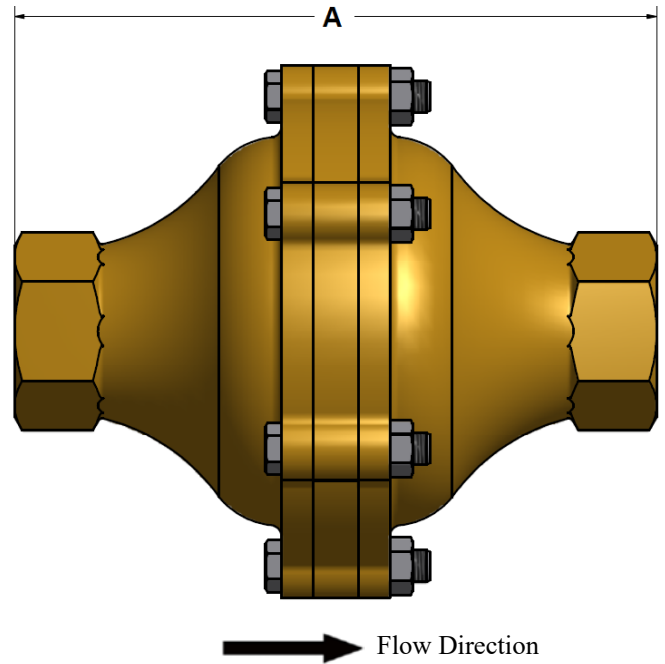

Material Specifications:

- ⇒ Valve Body - Bronze UNS C83600
- ⇒ O-Rings - EPDM
- ⇒ Diaphragm - EPDM
- ⇒ Orifice - Polyphenylsulfone
- ⇒ Centerplate - UNS C83600
- ⇒ Orifice Holder - UNS C83600
- ⇒ Retainer Cage - 316SS

Size	Dim A	Connection
1-1/2"	8.87	FNPT x FNPT

Available Flow Rates:

- ⇒ 26.0, 27.0, 28.0, 29.0, 30.0, 31.0, 32.0, 33.0, 34.0, 35.0, 36.0, 37.0, 38.0, 39.0, 40.0, 41.0, 42.0, 43.0, 44.0, 45.0, 46.0, 47.0, 48.0, 49.0, 50.0

