




Name: Mesurflo

Sizes: 6", 8" & 10"

GPM: 250 - 2500

Type: Automatic Balancing Valve

Model: 2546 - Welded

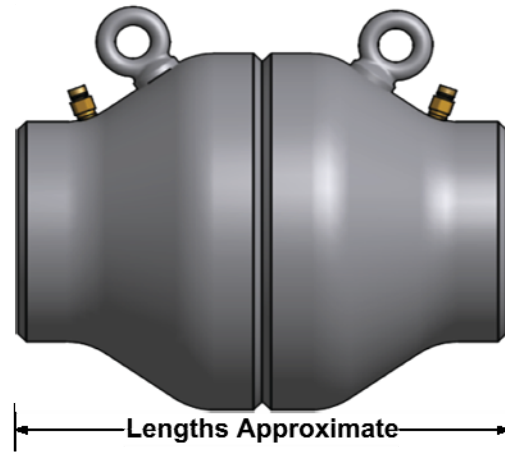

Flow Direction 

Standard Features:

- Welded Connections
- 25 GPM Increments
- Differential Operating Pressure
5-80 PSID
- $\pm 10\%$ Accuracy
- Operating Temperature Range 32°F to 225°F
- 1/4" Pressure / Temperature Ports
- Valves Labeled with Model No., Size & Flow Rate
- Working Pressure Rating per ASME Class 150 (Valve Body Suitable for 200 PSIG)
- Consult Factory for ASME Class 300 Flange Requirements (Valve Body Suitable for 400 PSIG)
- Length changes as flow rates are increased
- Hooks attached for ease of handling for installation placement

Options:

- Stainless Steel Tag-Chain Upon Request

MATERIAL SPECIFICATIONS	
Valve Body	Carbon Steel
Weld	Carbon Steel
Pressure / Temperature Ports	Brass
Adapter Plate	Carbon Steel
Retainer Cage	Stainless Steel
Diaphragm	EPDM
Orifice	Polyphenylsulfone
Orifice Holder	Brass
Clip	Stainless Steel



Name: Mesurflo Dimensions

Sizes: 6", 8" & 10"

Type: Automatic Balancing Valve

Model: 2546 - Welded



Dimensions vary with GPM selection		
Connection Size (IN) Flange Size (IN)	Valve Length (IN) Appx.	GPM
6 / 11	14	250-625
	18	650-875
	20	900
8 / 13	18	600-800
	20	825-1100
	24	1125-1400
	24	1425-1600
10 / 16	28	1000-1875
	32	1900-2250
	34	2275-2500

