




Model: Mesurflo® 2520

Sizes: 3/4", 1", 1-1/4" and 1-1/2"

GPM: 0.5 - 25.0

Type: Inline Automatic Balancing Valve

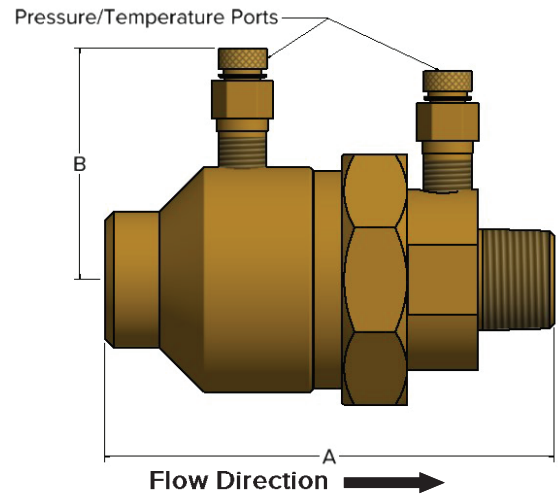

Standard Features:

- FNPT and MNPT Inlet Connections
- FNPT, FSWT and MNPT Outlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure
 - 2 - 80 PSID Range 0.5 - 5.0 GPM
 - 3 - 80 PSID Range 5.5 - 17.0 GPM
 - 5 - 80 PSID Range 18.0 - 25.0 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225°F
- 1/4" Pressure/Temperature Ports
- Valves Labeled with Model Number, Size and Flow Rate
- Dryseal Pipe Threads
- Valve Body Suitable for 600 PSIG

Options:

- Plugged (Ports Machined with 1/4" Plug)
- Extended Pressure/Temperature Ports
- Pressure Taps
- Stainless Steel Tag-Chain Upon Request

Material Specifications	
Valve Body	Brass
Union Nut	Brass
Tailpiece	Brass
Pressure/Temperature Ports	Brass
O-Rings	EPDM
Diaphragm	EPDM
Retainer Ring	Stainless Steel
Orifice	Polyphenylsulfone

Dimensions			
		in	mm
1/2"	A	4.7	119.4
	B	3.9	99.1
3/4"	A	4.7	119.4
	B	2.4	61.0
1"	A	4.9	124.5
	B	2.4	61.0
1-1/4"	A	4.9	124.5
	B	2.4	61.0