




**Sizes: 1-1/2", 2", 2-1/2" & 3"**

**Lengths: 12", 18", 24" & 36"**


**Type: Stainless Steel Braided Flexible Hose**

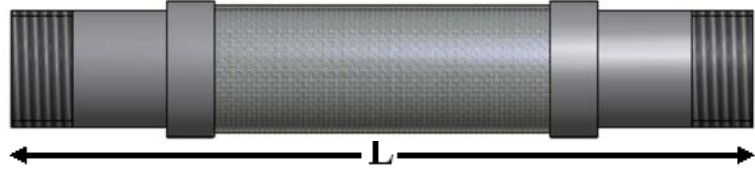

Hays braided hose is designed to be used on Commercial HVAC Systems where system pressures require heavy duty hose that withstands years of fluctuating and extreme pressure situations. The braiding also limits the hose from crimping, which reduces flow and impairs the function of the coil.

### **Hose Specifications:**

- 321 Stainless Steel Corrugated Hose
- Annular Close Pitch Corrugations
- 304 Stainless Steel Single Braid
- 304 Stainless Steel Braid Collars
- Carbon Steel Male NPT Connections
- Approximate O.D. (Outside Diameter): 1-1/2" (2.14), 2" (2.69), 2-1/2" (3.42), 3" (3.99)
- Maximum Working Pressure Meets or Exceeds: 400 psi (1-1/2" - 2-1/2"), 285 psi (3")
- Minimum Burst Pressure: Four (4) Times the Working Pressure
- Temperature Rating: 40° F to 200° F
- Constant Flexing: 1-1/2" (11 in), 2" (13 in), 2-1/2" (15 in), 3" (18 in)
- Static Bend: 1-1/2" (5 in), 2" (6 in), 2-1/2" (7 in), 3" (9 in)
- Optional Union for Swivel Connection: Brass or Steel
- Appx. Weight (Lbs per Foot): 1-1/2" (1.4), 2" (1.8), 2-1/2" (2.1), 3" (2.4)

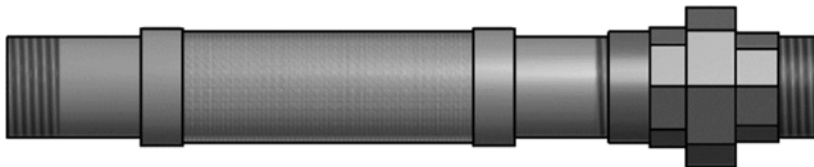

<sup>1</sup>Hose available with or without the union. Must specify when ordering if union is required.

\*Dimension "L" equals overall length of the hose not including the union.