




**Name: Mesurflo**

**Sizes: 1/2", & 3/4"**

**GPM: 0.50 - 9.00**

**Type: Automatic Balancing Valve**

**Model: 2511**

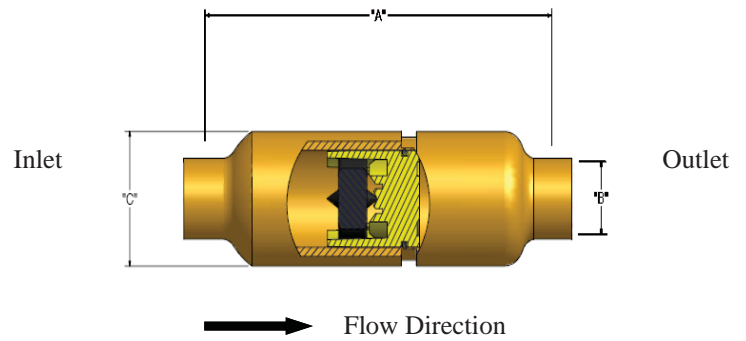

**Standard Features:**

- FSWT Inlet / Outlet Connections
- Differential Operating Pressure:  
2-80 PSID 0.50-5.00 GPM  
3-80 PSID 5.50-9.00 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225° F
- Available in 4" or 5-1/2" Lengths
- Valve Body Suitable for 522 PSIG
- Valves Labeled with Model No., Size & Flow Rate

MATERIAL SPECIFICATIONS	
Valve Body	Copper
O-Rings	EPDM
Retainer	Stainless Steel
Diaphragm	EPDM
Orifice	Polyphenylsulfone

Dimensions								
	1/2"				3/4"			
	4"(114)		5-1/2"(140)		4"(114)		5-1/2"(140)	
	IN	MM	IN	MM	IN	MM	IN	MM
A	3.0	76	4.5	114	3.0	76	4.5	114
B	0.63	16	0.63	16	0.88	22	0.88	22
C	1.4	36	1.4	36	1.4	36	1.4	36