




Name: Mesurflo® 2513

Sizes: 1/2", 3/4" and 1"

GPM: 0.5 - 9.0

Type: Inline Automatic Balancing Valve

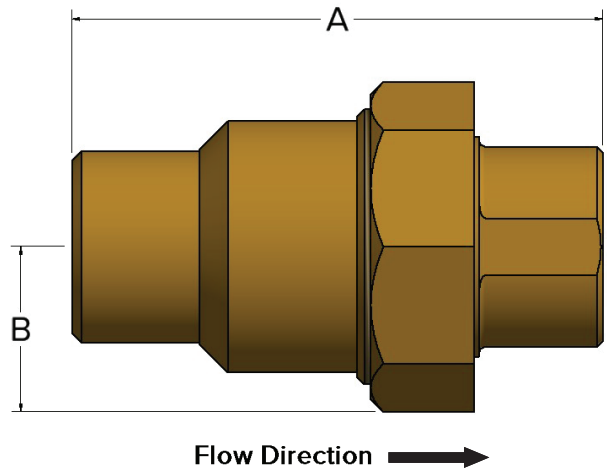

Standard Features:

- 1/2", 3/4" and 1" FSWT Inlet /Outlet Connections
- 3/4" Female and Male Garden Hose Inlet/Outlet Connections
- 1/2" and 3/4" FNPT and MNPT Inlet/Outlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure:
2 - 80 PSID 0.5 - 5.0 GPM
3 - 80 PSID 5.5 - 9.0 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225°F
- Dryseal Pipe Threads
- Valves Labeled with Model Number, Size and Flow Rate
- Valve Body Suitable for 600 PSIG

Material Specifications	
Valve Body	Brass
Tailpiece	Brass
Coupling Nut	Brass
O-Rings	EPDM
Diaphragm	EPDM
Orifice	Polyphenylsulfone

Dimensions			
A		B	
in	mm	in	mm
3.4	86.4	1.3	33.1