



Name: Mesurflo Stainless Steel

Sizes: 3/4", 1", 1-1/4" & 1-1/2"

GPM: 9.00 - 25.0

Type: Automatic Balancing Valve

Model: 2520SS



Standard Features:


- ⇒ 3/4"-1" FNPT Inlet & Outlet Connections
- ⇒ 1-1/4"-1-1/2" FNPT Inlet & MNPT Outlet Connections
- ⇒ Changeable GPM Flow Cartridges
- ⇒ Differential Operating Pressure
 - 9.00 - 17.0 GPM (4-80 PSID)
 - 18.0 - 25.0 GPM (5-80 PSID)
- ⇒ ± 10% Accuracy
- ⇒ Operating Temperature Range 32°F to 225°F
- ⇒ 1/4" Pressure / Temperature Ports
- ⇒ Valves Labeled with Model No., Size & Flow Rate
- ⇒ Dryseal Pipe Threads
- ⇒ Valve Body Rated for 600 PSIG
- ⇒ Limited Lifetime Warranty

Options:

- ⇒ Extended Pressure/Temperature Ports

Material Specifications:

- ⇒ Valve Body - 316 Stainless Steel (Other material available)
- ⇒ Tailpiece - 316 Stainless Steel (Other material available)
- ⇒ Union Nut - 316 Stainless Steel
- ⇒ O-Rings - EPDM
- ⇒ Retainer - 316 Stainless Steel (Other material available)
- ⇒ Diaphragm - EPDM
- ⇒ Orifice - Polyphenylsulfone
- ⇒ Pressure Temperature Ports - 316 Stainless Steel (Other material available)

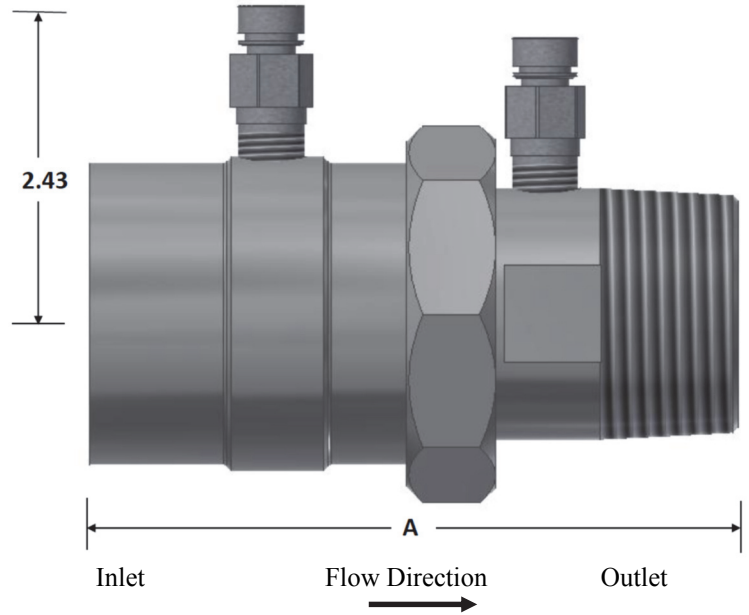

Available Flow Rates:

- ⇒ 9.00, 10.0, 11.0, 12.0, 13.0, 14.0, 15.0, 16.0, 17.0, 18.0, 19.0, 20.0, 21.0, 22.0, 23.0, 24.0, 25.0

Size	Dim A	Connection
3/4"	4.6	FNPT x FNPT
1"	4.9	FNPT x FNPT
1-1/4"	5.0	FNPT x MNPT
1-1/2"	5.2	FNPT x MNPT