



**Name: Mesurflo Stainless Steel**

**Sizes: 1/2", 3/4"**

**GPM: 0.50 - 9.00**

**Type: Automatic  
Balancing Valve**

**Model: 2510SS**



**Standard Features:**


- ⇒ FNPT Inlet / Outlet Connections
- ⇒ Changeable GPM Flow Cartridges
- ⇒ Differential Operating Pressure:  
0.50-5.00 GPM (3-80 PSID)  
5.50-9.00 GPM (4-80 PSID)
- ⇒ ± 10% Accuracy
- ⇒ Operating Temperature Range 32°F to 225° F
- ⇒ 1/4" Pressure / Temperature Ports
- ⇒ Dryseal Pipe Threads
- ⇒ Valves Labeled with Model No., Size & Flow Rate
- ⇒ Valve Body Rated for 600 PSIG
- ⇒ Limited Lifetime Warranty

**Options:**

- ⇒ Extended Pressure/Temperature Ports
- ⇒ Stainless Steel Tag-Chain

**Material Specifications:**

- ⇒ Valve Body - 316 Stainless Steel (Other material available)
- ⇒ Tailpiece - 316 Stainless Steel (Other material available)
- ⇒ Union Nut - 316 Stainless Steel
- ⇒ O-Rings - EPDM
- ⇒ Retainer - 316 Stainless Steel (Other material available)
- ⇒ Diaphragm - EPDM
- ⇒ Orifice - Polyphenylsulfone
- ⇒ Pressure Temperature Ports - 316 Stainless Steel (Other material available)

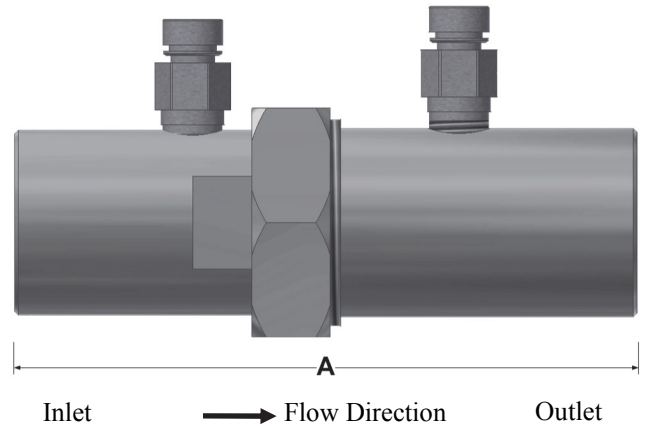

**Available Flow Rates:**

- ⇒ 0.50, 0.63, 0.75, 1.00, 1.13, 1.25, 1.50, 1.63, 1.75, 2.00, 2.25, 2.50, 3.00, 3.25, 3.50, 4.00, 4.50, 5.00, 5.50, 6.00, 6.50, 7.00, 7.50, 8.00, 9.00

Size	Dim A	Connection
1/2"	4.6	FNPT x FNPT
3/4"	4.6	FNPT x FNPT

