




Model: Mesurflo® 2510

Sizes: 1/2", 3/4" and 1"

GPM: 0.5 - 9.0

**Type: Inline Automatic
Balancing Valve**

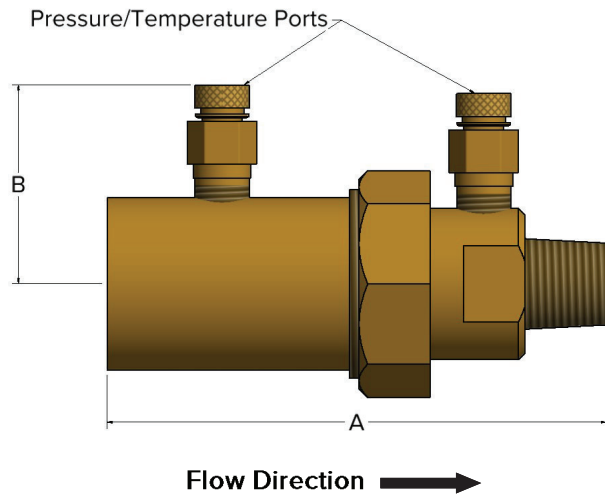

Standard Features:

- FNPT and MNPT Inlet/Outlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure:
2 - 80 PSID 0.5 - 5.0 GPM
3 - 80 PSID 5.5 - 9.0 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225°F
- 1/4" Pressure/Temperature Ports
- Dryseal Pipe Threads
- Valve Body Suitable for 600 PSIG
- Valves Labeled with Model Number, Size and Flow Rate

Material Specifications	
Valve Body	Brass
Union Nut	Brass
Tailpiece	Brass
Pressure/Temperature Ports	Brass
O-Rings	EPDM
Diaphragm	EPDM
Retainer Ring	Stainless Steel
Orifice	Polyphenylsulfone

Options:

- Pressure Taps
- Extended Pressure/Temperature Ports
- Stainless Steel Tag-Chain Upon Request

Dimensions			
A		B	
in	mm	in	mm
3.1	78.7	2.0	50.8