

HAYS

2 1/2" FLANGED

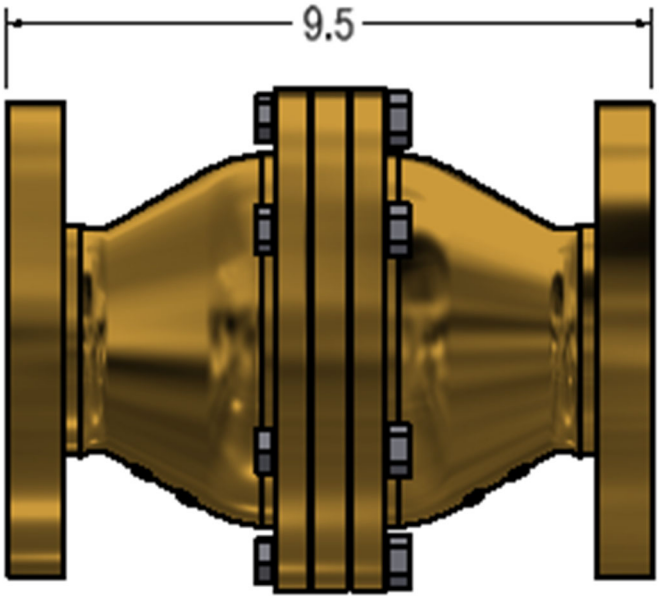

Flow Direction

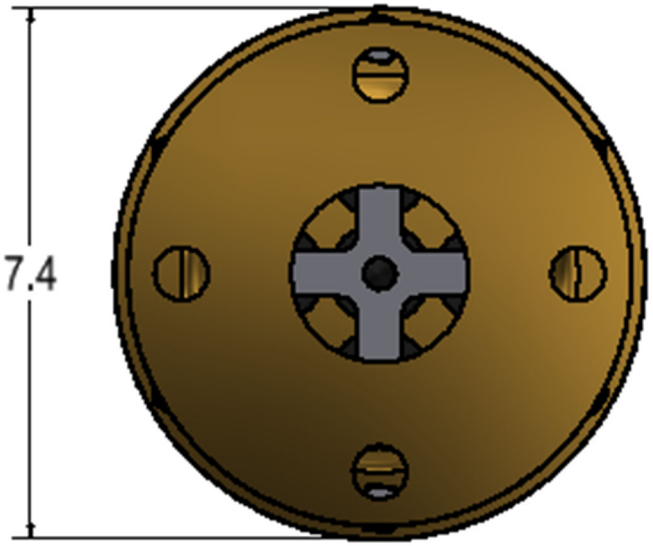

Name: **Mesurflo® Bronze Automatic Balancing Valves**

Sizes: **2 1/2" Flanged**

GPM: **50-120**

Type: **Automatic Balancing Valve**

Model: **2335**

Standard Features:

- Flanged Inlet/Outlet Connections
- 1 GPM Increments 50.0-120.0 GPM
- Flow Cartridges are Changeable
- Differential Operating Pressure: **5-80 PSID**
- ± 10% Accuracy
- ASME Class 150 Flanges
- Operating Temperature Range 32°F to 225° F
- Valves Labeled with Model No., Size & Flow Rate
- 4 Bolt Flange
- Working Pressure Rating per ASME Class 150

Options:

- Stainless Steel Tag-Chain Upon Request
- Consult Factory for ASME Class 300 Flanges
- Consult Factory for Additional Flow Rate (GPM) Requests.

MATERIAL SPECIFICATIONS	
Valve Body	C83600 Bronze
O-Rings	Viton
Retainer Cage	Stainless Steel
Diaphragm	EPDM
Orifice	Polyphenylsulfone
Diaphragm/Orifice Retainer	Stainless Steel
Center Plate	C83600 Bronze