



**Name: Mesurflo Stainless Steel Automatic Balancing Valve**

**Sizes: 3/8", 1/2" & 3/4"**

**GPM: 0.30 - 10.0**


**Type: Automatic Balancing Valve**

**Model: 2305SS**



**Standard Features:**

- ⇒ FNPT Inlet & Outlet Connections
- ⇒ Differential Operating Pressure: 15-150 PSID
- ⇒ Constant Flow Regardless of Pressure
- ⇒ Quiet Operation
- ⇒ Flexing Diaphragm is Self Cleaning
- ⇒ Unique Long-Life Design
- ⇒ ± 10% Accuracy
- ⇒ Operating Temperature Range 32°F to 160° F
- ⇒ Dryseal Pipe Threads
- ⇒ Valves Labeled with Model No., Size & Flow Rate
- ⇒ Valve Body Rated for 600 PSIG
- ⇒ Limited Lifetime Warranty

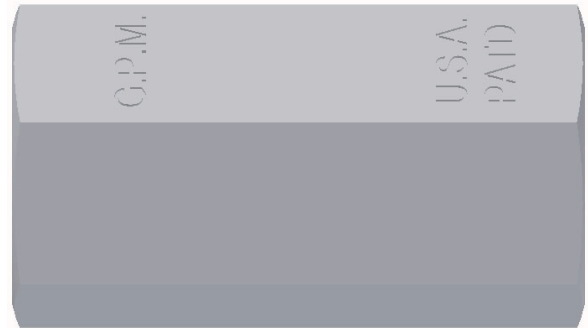

**Options:**

- ⇒ Stainless Steel Tag-Chain

Dimension Chart	Overall Length
3/8"	2.6
1/2"	2.2
3/4"	2.6

**Material Specifications:**

- ⇒ Valve Body - 316 Stainless Steel (Other material available)
- ⇒ Tailpiece - 316 Stainless Steel Other material available)
- ⇒ O-Rings - Nitrile Buna-N
- ⇒ Retainer - 302 Stainless Steel Other material available)
- ⇒ Diaphragm - Nitrile Buna-N
- ⇒ Orifice - Celcon

**Available Flow Rates:**

- ⇒ 3/8" - 0.30, 0.40, 0.50, 0.60, 0.75, 1.00, 1.25, 1.50, 1.75, 2.00
- ⇒ 1/2" - 0.50, 0.60, 0.75, 1.00, 1.25, 1.50, 1.75, 2.00, 2.50, 3.00, 3.50, 4.00, 4.50, 5.00
- ⇒ 3/4" - 1.00, 1.25, 1.50, 1.75, 2.00, 2.50, 3.00, 3.50, 4.00, 4.50, 5.00, 6.00, 7.00, 8.00, 9.00, 10.0

