




Model: Mesurflo® 2511

Sizes: 1/2" and 3/4"

GPM: 0.5 - 9.0

Type: Inline Automatic Balancing Valve

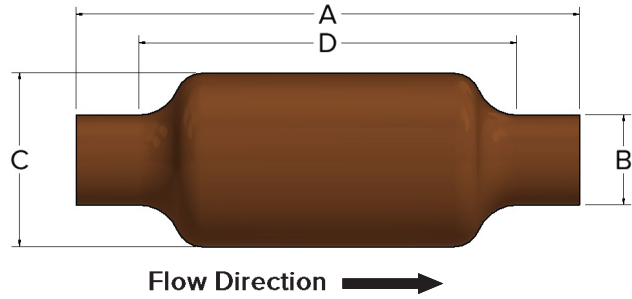

Standard Features:

- FSWT Inlet / Outlet Connections
- Differential Operating Pressure:
2 - 80 PSID 0.5 - 5.0 GPM
3 - 80 PSID 5.5 - 9.0 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225°F
- Available in 4" or 5-1/2" Lengths
- Valve Body Suitable for 522 PSIG
- Valves Labeled with Model Number, Size and Flow Rate
- Flow Cartridges are Not Changeable

Material Specifications	
Valve Body	Copper
O-Rings	EPDM
Retainer	Stainless Steel
Diaphragm	EPDM
Orifice	Polyphenylsulfone

Dimensions								
1/2"					3/4"			
Size	4"(114)		5-1/2"(140)		4"(114)		5-1/2"(140)	
	in	mm	in	mm	in	mm	in	mm
A	4.0	101.6	5.5	139.7	4.0	101.6	5.5	139.7
B	0.6	15.2	0.6	15.2	0.9	22.8	0.9	22.8
C	1.4	35.6	1.4	35.6	1.4	35.6	1.4	35.6
D	3.0	76.2	4.5	114.3	3.0	76.2	4.5	114.3