



Sizes: 1/2", 3/4", 1", 1-1/4", 1-1/2" & 2"


Type: Y-Ball Combination Strainer with Union

Specifications:

- Nominal Working Pressure: 400 PSI
- Working Temperature: 32°F - 225°F
- One Pressure/Temperature Port with PT included¹
- Blowdown Valve w/ Hose Connector²
- Tee or Lever Handle
- Inlet Connections FSWT, FNPT
- Outlet Connections FSWT, FNPT or MNPT
- Strainer Screen Stainless Steel / 20 Mesh

Options:

- Tee Handles (1/2"-1" only)
- Extended Handles
- Bypass Port to be machined for 3-way use³
- If Right or Left Hand Porting is Needed on the Strainer, Consult Factory for Assistance

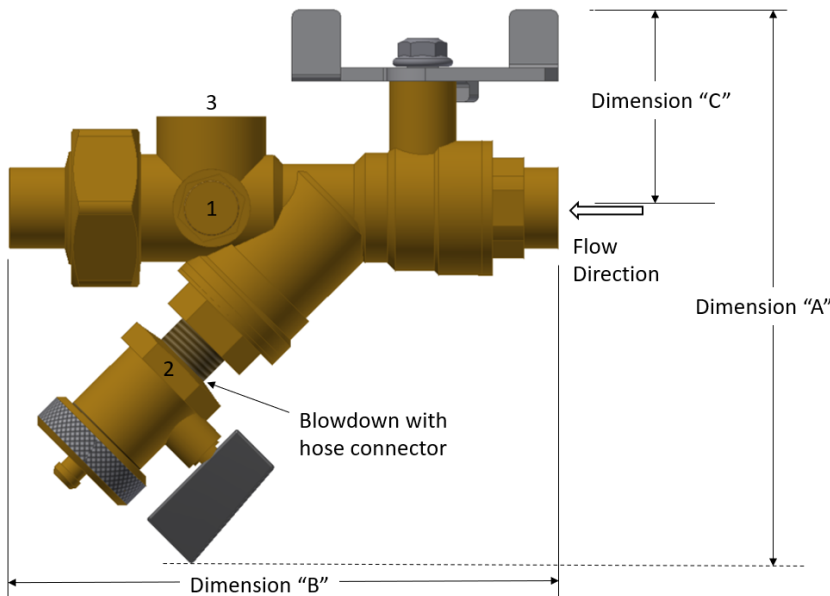

Dimensions*			
Size (In)	"A"	"B"	"C"
1/2 (YS)	5.5	5.0	2.0
3/4 (YS)	5.5	5.4	2.0
3/4 (YM)	6.1	6.1	2.1
1 (YM)	6.1	6.2	2.1
1-1/4 (YL)	8.0	7.6	2.3
1-1/2 (YL)	8.0	7.7	2.3
2 (YX)	9.3	10.2	3.3

Material Specifications	
Seats	PTFE
Ball	Chrome Plated Brass
Stem	Brass
Handle	Steel
Valve Body	Brass
Screw	Steel
O-Rings	EPDM
Hex Socket Pipe Plug	Brass
Union Nut	Brass
Tailpiece	Brass
Fixed End	Brass
Pressure/ Temperature Ports	Brass
Strainer	Stainless Steel

¹ Extended Handles cannot be ordered without extended Pressure/Temperature Ports

* Dimensions listed are approximate. Various connections types can change the lay lengths. Consult factory for more detail.