



HAYS

**Name: Mesurflo® Bronze Automatic Balancing Valves**

**Sizes: 1-1/2"**

**GPM: 26.0 - 50.0**

**Type: Automatic Balancing Valve**

**Model: 2333**

**Standard Features Include:**

- ⇒ FNPT Inlet & Outlet Connections
- ⇒ Differential Operating Pressure: 5-80 PSID
- ⇒ ± 10% Accuracy
- ⇒ Changeable GPM Cartridges
- ⇒ Operating Temperature Range 32° to 225°F
- ⇒ Valves Labeled with Model No., Size & Flow Rate
- ⇒ Valve Body Rated for 400 PSIG
- ⇒ Limited Lifetime Warranty

**Options:**


- ⇒ Stainless Steel Tag-Chain

**Material Specifications:**

- ⇒ Valve Body - Bronze UNS C83600
- ⇒ O-Rings - EPDM
- ⇒ Diaphragm - EPDM
- ⇒ Orifice - Polyphenylsulfone
- ⇒ Centerplate - UNS C83600
- ⇒ Orifice Holder - UNS C83600
- ⇒ Retainer Cage - 316SS

**Available Flow Rates:**

- ⇒ 26.0, 27.0, 28.0, 29.0, 30.0, 31.0, 32.0, 33.0, 34.0, 35.0, 36.0, 37.0, 38.0, 39.0, 40.0, 41.0, 42.0, 43.0, 44.0, 45.0, 46.0, 47.0, 48.0, 49.0, 50.0

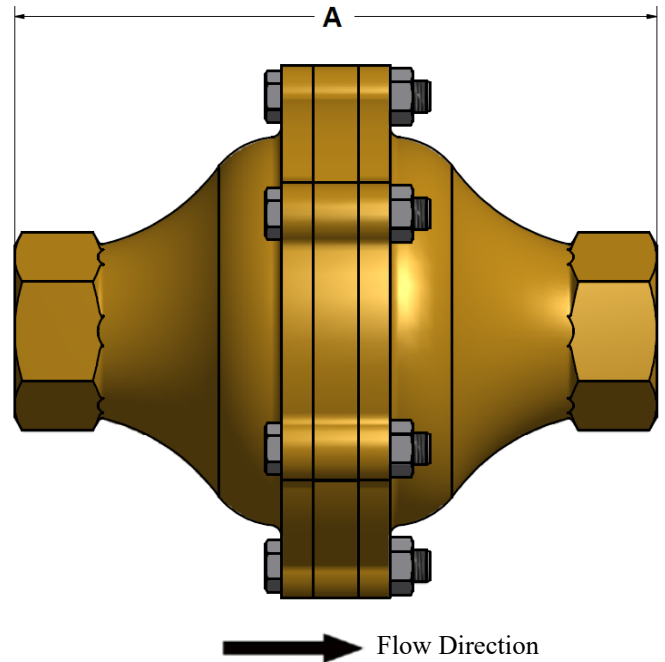

| Size   | Dim A | Connection  |
|--------|-------|-------------|
| 1-1/2" | 8.87  | FNPT x FNPT |

