




Name: Mesurflo

Sizes: 2", 2-1/2" & 3"

GPM: 40.0 - 200.0

Type: Automatic Balancing Valve

Model: 2540

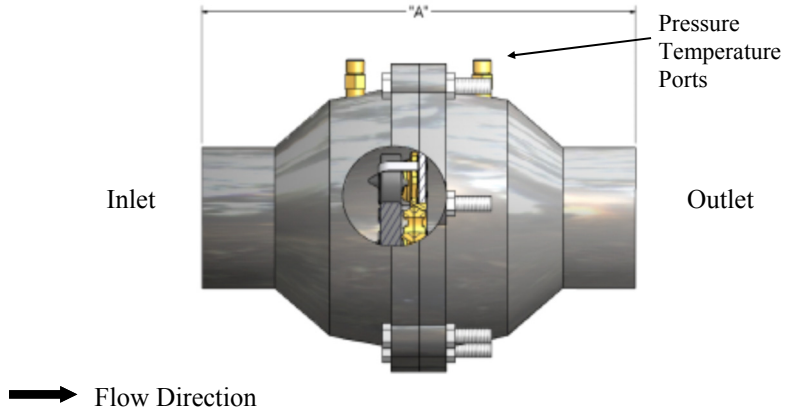

Standard Features:

- FNPT Inlet/Outlet Connections
- 5 GPM Increments
- Changeable GPM Flow Cartridges
- Differential Operating Pressure
5-80 PSID 40-200 GPM
- $\pm 10\%$ Accuracy
- Operating Temperature Range 32°F to 225° F
- 1/4" Pressure / Temperature Ports
- Valves Labeled with Model No., Size & Flow Rate
- Dryseal Pipe Threads
- Valve Body Suitable for 400 PSIG

Options:

- Extended Pressure / Temperature Ports
- Pressure Taps
- Stainless Steel Tag-Chain Upon Request

MATERIAL SPECIFICATIONS

Valve Body	Gray Iron
Pressure / Temperature Ports	Brass
O-Rings	EPDM
Retainer Cage	Stainless Steel
Diaphragm	EPDM
Orifice	Polyphenylsulfone
Orifice Holder	Brass
Center Plate 4-Hole Pattern	Carbon Steel

Dimensions

		A	
Size	GPM Range	IN	MM
2	40-100	11.6	295
2-1/2	60-150	11.3	287
3	90-200	11.2	284