




Model: Mesurflo® 2540

Sizes: 2", 2-1/2" and 3"

GPM: 40.0 - 200.0

Type: Inline Automatic Balancing Valve

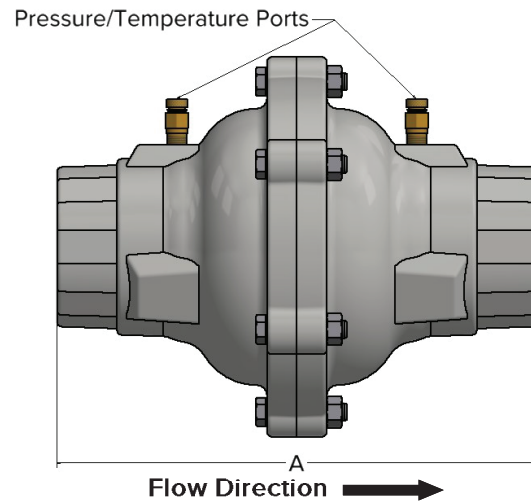

Standard Features:

- FNPT Inlet/Outlet Connections
- 5.0 GPM Increments
- Changeable GPM Flow Cartridges
- Differential Operating Pressure 5 - 80 PSID 40.0 - 200.0 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225°F
- 1/4" Pressure/Temperature Ports
- Valves Labeled with Model Number, Size and Flow Rate
- Dryseal Pipe Threads
- Valve Body Suitable for 400 PSIG

Options:

- Extended Pressure/Temperature Ports
- Pressure Taps
- Stainless Steel Tag-Chain Upon Request

Material Specifications	
Valve Body	Gray Iron
Pressure/Temperature Ports	Brass
O-Rings	EPDM
Retainer Cage	Stainless Steel
Diaphragm	EPDM
Orifice	Polyphenylsulfone
Orifice Holder	Brass
Center Plate 4-Hole Pattern	Carbon Steel

Dimensions			
	A		
Size	GPM Range	in	mm
2"	40.0 - 100.0	12.0	304.8
2-1/2"	60.0 - 150.0	12.0	304.8
3"	90.0 - 200.0	12.0	304.8