




Model: Mesurflo® 2521

Sizes: 3/4" and 1"

GPM: 9.0 - 24.0

Type: Inline Automatic Balancing Valve

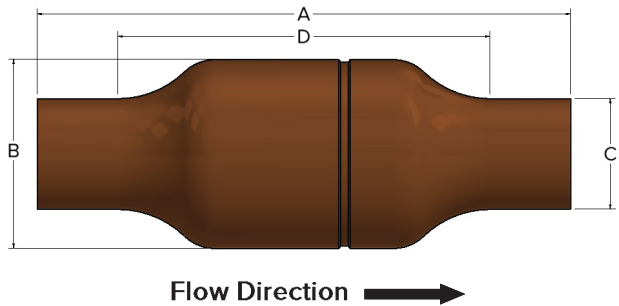

Standard Features:

- FSWT Inlet/Outlet Connections
- Differential Operating Pressure:
3 - 80 PSID 9.0 - 17.0 GPM
5 - 80 PSID 18.0 - 24.0 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225°F
- Valves Labeled with Model Number, Size and Flow Rate
- Valve Body Suitable for 522 PSIG
- Flow Cartridges are Not Changeable

Material Specifications	
Valve Body	Copper
O-Rings	EPDM
Retainer Cage	Stainless Steel
Diaphragm	EPDM
Orifice	Polyphenylsulfone
Orifice Holder	Brass
Cartridge Holder	Brass

Dimensions				
Size	3/4" (19)		1" (25)	
	in	mm	in	mm
A	6.0	152.4	6.0	152.4
B	2.1	53.3	2.1	53.3
C	0.9	22.9	1.2	30.5
D	4.5	114.3	4.2	106.7