
**Sizes:** 2”

**Model:** 25TC - Tri Clamp


**Flowrate: 26.0 - 100.0 GPM**

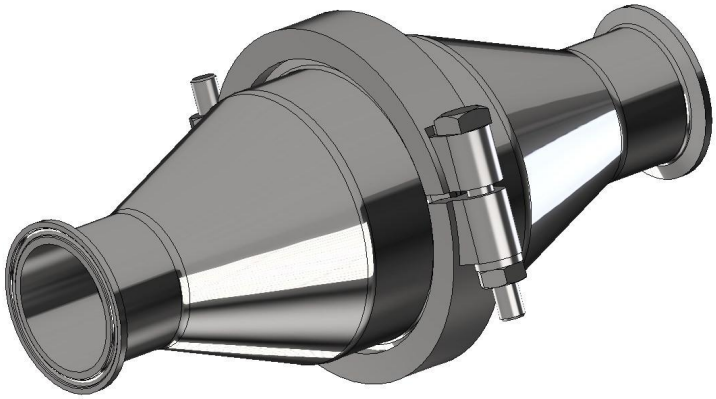


**Standard Features:**

- Pressure Rating 125 PSIG
- Operating Temperature Range 32°F to 225° F
- Differential Operating Pressure: 26.0-100.0 GPM (5-80 PSID)
- ± 10% Accuracy
- Flow Direction Indicated With Label
- Changeable GPM Flow Cartridges • Weight: 5.5 lbs

| Valve Sizes | | | | | | | |
|---|---|---|---|---|---|---|---|
| Size | Flow Rate | Connection | Clamp Size | Gasket | A-Dim. | B-Dim. | C-Dim. |
| 2” | 26.0-100.0 GPM | 2” Tri Clamp | 2” | 2” | 2.5 | 11.0 | 5.3 |

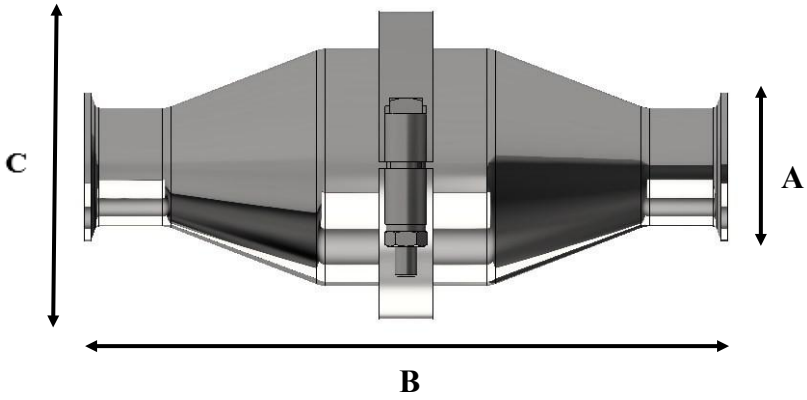


| | Part | Material |
|---|---|---|
| 1 | Valve Body | 316 Stainless Steel |
| 2 | 2-Bolt 4” Clamp | 304 Stainless Steel |
| 3 | Split Gasket | Viton |
| 4 | Retainer | 316 Stainless Steel |
| 5 | Spacer | 316 Stainless Steel |
| 6 | Diaphragm | EPDM |
| 7 | Orifice | Polyphenylsulfone |
| 8 | Orifice Plate | 316 Stainless Steel |

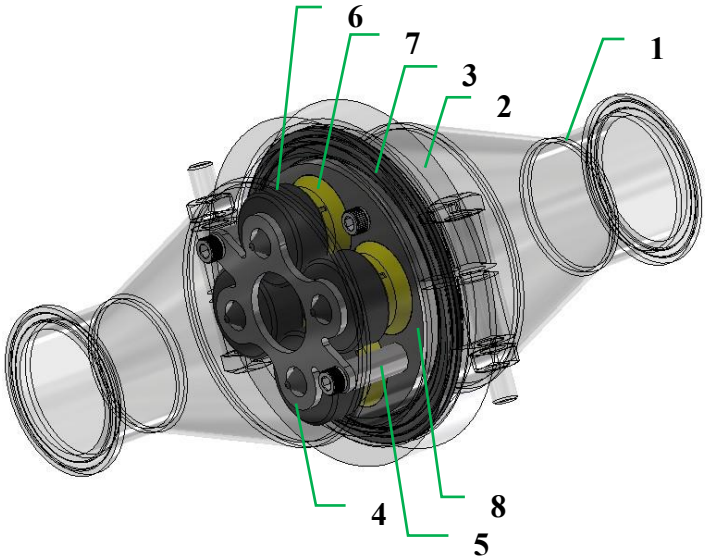

HAYS

