




Name: Mesurflo

Sizes: 1/2", 3/4"

GPM: 0.50 - 9.00

**Type: Y-Ball Automatic
Balancing Valve**

Model: 2515

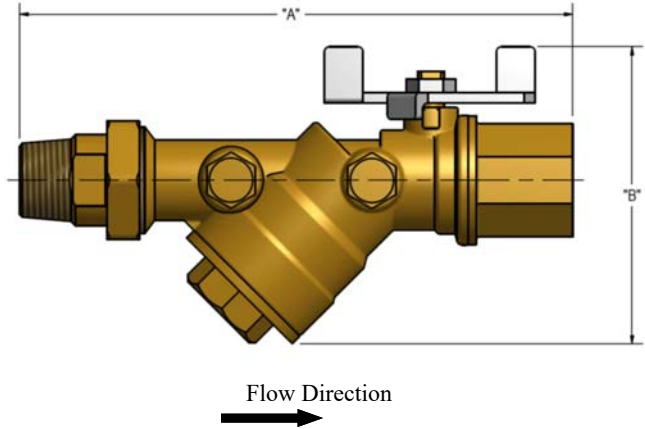

Standard Features:

- FNPT, FSWT and MNPT Outlet / Inlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure:
 - **2-80 PSID 0.50-5.00 GPM**
 - **3-80 PSID 5.50-9.00 GPM**
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225° F
- 1/4" Pressure / Temperature Ports
- Lever or Short Handle (Pictured)
- Inlet and Outlet Port Options
- Valves Labeled with Model No., Size & Flow Rate
- Dryseal Pipe Threads
- Valve Body Suitable for 600 PSIG

Options:

- Extended Lever Handles Only
- Extended Pressure / Temperature Ports
- Stainless Steel Tag-Chain Upon Request

MATERIAL SPECIFICATIONS	
Valve Body	Brass
Ball	316 Stainless Steel
Pressure / Temperature Ports	Brass
O-Rings	EPDM
Ball Seat	Teflon
Stem	316 Stainless Steel
End Cap	Brass
Diaphragm	EPDM
Ball Valve End Fitting	Brass
Short Handle	Zinc Plated Steel
Orifice	Polyphenylsulfone

Dimensions			
A		B	
IN	MM	IN	MM
6.5	165	3.47	88